


ECOLUXX BELLIO

High-bay

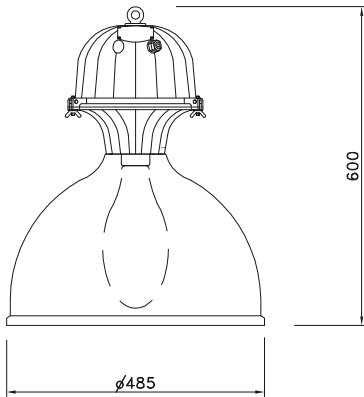

BEL AL

Body:

Powder painted aluminium gear box

Optic:

BEL AL – profiled aluminium reflector

Wiring:

K compensated, ballast cat. B
 QS high pressure sodium or metal halide lamp (HPS, HQI)
 M mercury lamp (MBF)
 E40wiring with E40 only

Application:

Pendant high bay, intended for storage and industrial halls.
 Optimal height of installation is 6–14m

Accessories:

Reflector AL – 5109901
 Toughened glass cover – 530201
 Protection steel grid – 54300

Next information:

BELLIO fittings are delivered without lamp. The right type of the lamp depends on components inside fitting – for info about recommended lamps visit our web sites www.ecoluxx.eu

	W	Ballast *	Ignitor	Lamp	Lampholder	Current A	kg
BELAL150Q	1x150	NAHJ	Serial 3,5-4,5kV	HQI	E27	1,8	5,3
BELAL150S	1x150	NAHJ	Serial 3,5-4,5kV	HPS	E40	1,8	5,4
BELAL250QS	1x250	NAHJ	Serial 3,5-4,5kV	HPS, HQI	E40	3	6
BELAL400QS	1x400	NAHJ	Serial 3,5-4,5kV	HPS, HQI	E40	4,6	7
BELAL250Q/2,15A	1x250	M	Paralel 0,6-1kV	HQI	E40	2,15	6
BELAL400Q/3,5A	1x400	M	Paralel 0,6-1kV	HQI	E40	3,5	7
BELAL125M	1x125	M	-	MBF	E27		5
BELAL250M	1x250	M	-	MBF	E40		5,8
BELAL400M	1x400	M	-	MBF	E40		6,5
BELAL E40	1x500	-	-	-	E40	-	4

*- NAHJ – ballast for high pressure sodium or metal halide lamps
 - M ballast for mercury vapour lamp

Accessories:

		Ø	kg
51029901	reflector AL	485	0,75
530201	glass	480	2,4
54300	protection grid	490	0,3



530201

ECOLUXX BELLIO


High-bay



BEL QS




5109091

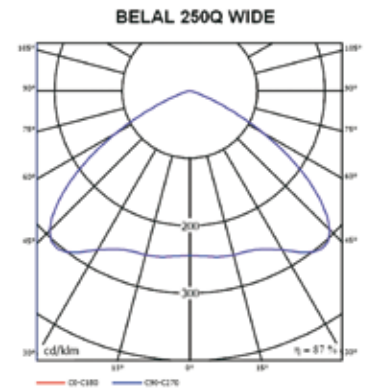

BEL QS




5109091

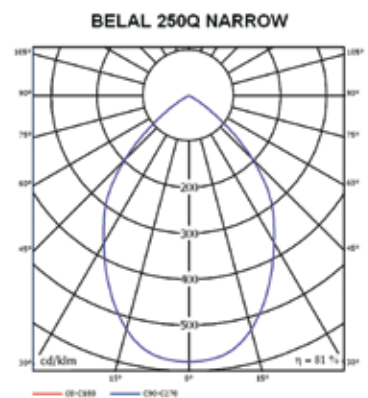

Next information:

Via movable lampholder the fitting can be installed as wide beam (bottom position of lampholder) or as narrow beam (top position of lampholder).

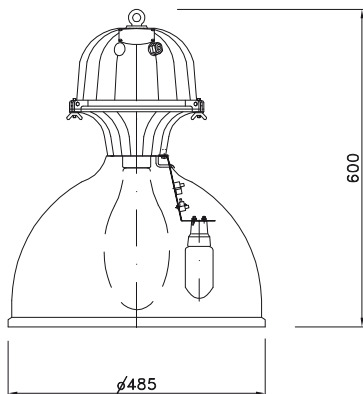

BEL.../Z

– the luminaires are equipped with auxiliary halogenid lamp 150W