


ECOLUXX C INC

Recessed light fittings for indirect illumination



C255INC

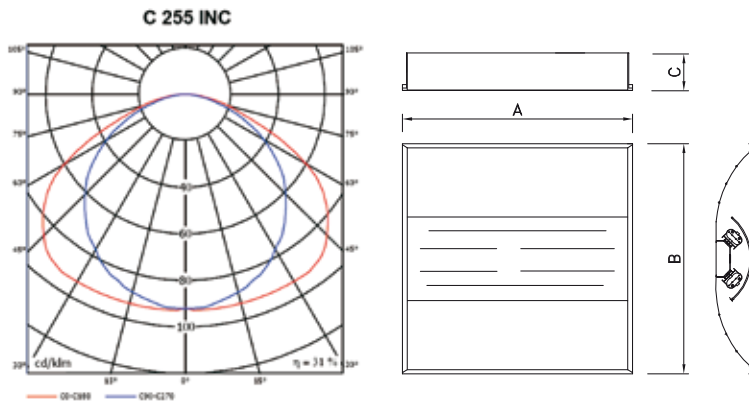

Body:

White painted (RAL 9003) metal sheet

Optic:

INC perforated lamps covers

Wiring:

- compensated, ballast cat. B
- EP high frequency ballast
- EPSA HFB analogue dimmable 1–10 V
- EPSD HFB digital dimmable

Application:

Recessed light fitting for installation into false ceiling with visible supporting structure (600x600 module).

Accessories:

- reduction frame (1064184000)

Versions:

- K with WIELAND connector
- F with flexible cord
- NZ emergency pack

Note:

These luminaires can not be installed into the gypsum plasterboard type ceiling.

| | # | W | lamp | A | B | C | kg |
|----------|--------------|------|------|-----|-----|-----|-----|
| C236INC# | EP, K, F, NZ | 2x36 | TC-L | 596 | 596 | 100 | 4,8 |
| C240INC# | EP, K, F, NZ | 2x40 | TC-L | 596 | 596 | 100 | 4,8 |
| C255INC# | K, F, NZ | 2x55 | TC-L | 596 | 596 | 100 | 3,5 |

– add to the basic code