


ECOLUXX C KP, KO

Recessed light fittings for direct-indirect illumination



C KP

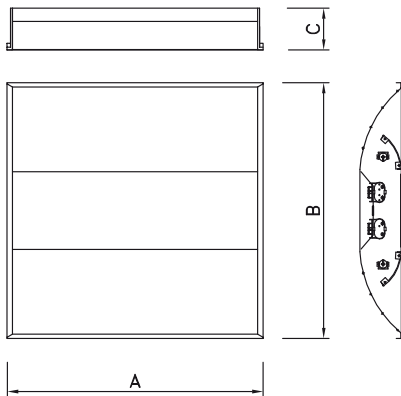

Body:

White painted (RAL 9003) metal sheet

Optic:

KP prismatic cover
 KO opal cover
 Perforated lamps covers

Wiring:

compensated, ballast cat. B
 EP high frequency ballast
 EPSA HFB analogue dimmable 1–10 V
 EPSD HFB digital dim

Application:

Recessed light fitting for installation into false ceiling with visible supporting structure (600x600 module).

Accessories:

Reduction frame (1064184000)

Versions:

K with WIELAND connector
 F with flexible cord
 NZ emergency pack

Note:

These luminaires can not be installed into the gypsum plasterboard.



	&	#	Lamp	W	A	B	C	kg
C140&#	KP, KO	600, EP, K, F, NZ	TC-L	1x40	596	596	100	1,5
C240&#	KP, KO	600, EP, K, F, NZ	TC-L	2x40	596	596	100	1,9
C155&#	KP, KO	600, K, F, NZ	TC-L	1x55	596	596	100	3,7
C255&#	KP, KO	600, K, F, NZ	TC-L	2x55	596	596	100	3,7
C214&#	KP, KO	600, K, F, NZ	T5	2x14	596	596	100	2,6
C414&#	KP, KO	600, K, F, NZ	TC-L + T5	4x14	596	596	100	3,7
C414&EP2#**	KP, KO	600, K, F, NZ	T5	4x14	596	596	100	6,5
C255/214&#**	KP, KO	600, K, F, NZ	TC-L + T5	2x55 + 2x14	596	596	100	6,5

& – use louvre type

** – 2 circuit wiring

– add to the basic code