


ECOLUXX Dimming

Light fittings ECOLUXX can be equipped with dimmable electronic ballasts. It is necessary to clearly specify the type of control unit, which you want to use for dimming. We offer dimmable ballast of renowned producers, especially HELVAR

Analogue dimmable electronic ballasts

HELVAR EL..sc – Controllable electronic ballasts for T8 and T5 Fluorescent Lamps

- Switch-Control / Analogue control
- Only 21 mm high
- Dimming range 1–100 % (EL4x14sc, EL4x18sc 3–100 %)

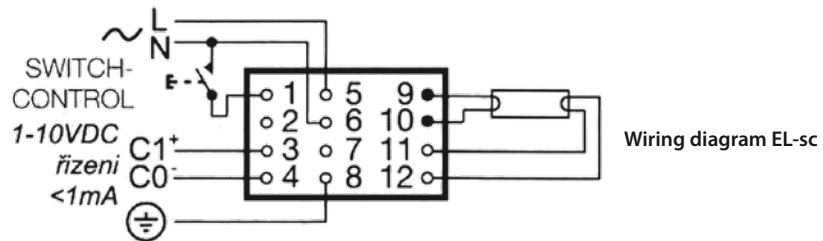

MIMO 2 light sensor

- Start up at full level.
- Light level selected by means of rotary disc.
- Reaction delay approximately 2 minutes.
- Controls up to 15 electronic ballasts.
- Supply voltage derived from the ballast.
- Compatible with Helvar EL-sc & EL-CHFC3 ballasts.



TK4 Slider Controller

- Switch Rating: 10 A (resistive) VAC
- Switch Load Capacity: Up to 20 Helvar HFC/CHFC/sc ballasts



Switch control



ECOLUXX Dimming

Digital dimmable electronic ballasts

HELVAR EL..si – Controllable electronic ballasts for T5 Fluorescent Lamps

- Only 21 mm high
- Digital DALI control
- Switch-Control / Digidim input
- Including DALI power supply 20 mA
- Dimming range 1–100 %


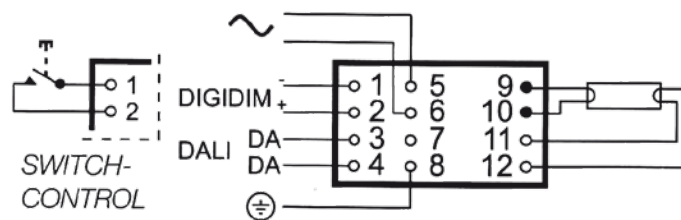


Schéma zapojení EL-si
Wiring diagram EL-si

Minisenzor 2

- For 4 electronic ballasts maximally
- Passive infra-red presence detector
- Infra-red remote control receiver
- Constant light control

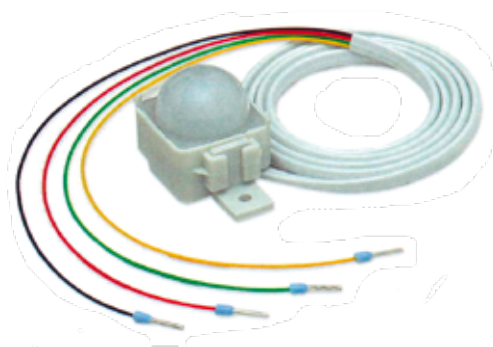

Pushbutton Panel

- Dimmer, control panel and remote all in the box.
- Control panels available in a choice of finishes.
- No special cables required.
- Pre-programmed to function as soon as installed.
- Up to four mimic control panels can be added.
- Diagnostic LED indication on dimmer.
- Thermal cut-out protection in the event of overheating.
- Last scene set is selected after external power failure.

