
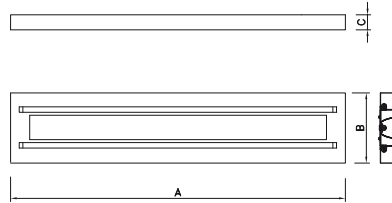


ECOLUXX EPOS

Pendant direct-indirect light fittings

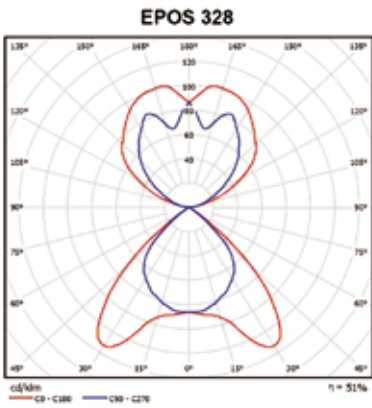

Body:

White painted (RAL 9003) metal sheet

Optic:

ALDP double parabolic louvre category 2 of highly polished aluminium

MATDP double parabolic louvre category 2 of mat aluminium

Wiring:

EP high frequency ballast

EPSA HFB analogue dimmable 1–10 V

EPSD HFB digital dimmable

Application:

Pendant light fittings for direct / indirect illumination.

Accessories:

Cord suspension 54101, 54103

Versions:

NZ emergency pack

MIRO louvre made of MIRO aluminium

RAL9006

Note:

The optimal assembly for this fitting is a two circuit assembly (EPOS... EP2), when the first circuit controls 1 lamp (direct part of illumination) and the second circuit controls 2 lamps which leads to the ceiling (indirect part of illumination).

Cord suspension set included in the fitting.



Typ *	W	A	B	C	R	kg
EPOS128ALDP **	1x28	1335	280	60	1250	4,8
EPOS328ALDP	3x28	1335	280	60	1550	5,0
EPOS135ALDP **	1x35	1635	280	60	1250	8,5
EPOS335ALDP	3x35	1635	280	60	1550	9,0

* – use code ALDP or MATDP to determine louvre type

* – use code EP2 by fittings with 2 circuit assembly

** – this fitting can be installed as surface mounting