
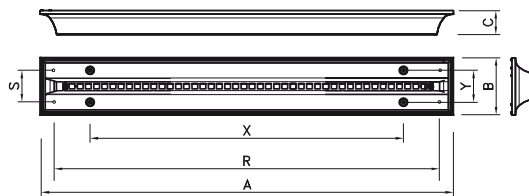


ECOLUXX ERA

Interior light fittings

ERA 128 MIRO SILVER

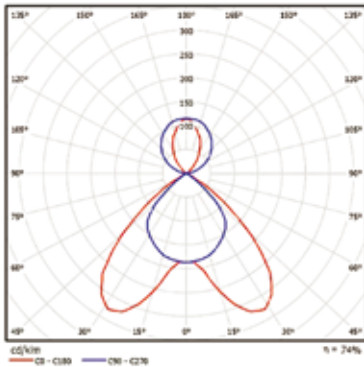

ERA 228 ALDP



Body:

Aluminium profile

Optic:

ALDP microlouvre MIRO SILVER®
 ALDP T5 double parabolic louvre of highly polished aluminium
 KO opal cover ACRYL SATINE®

Wiring:

EP high frequency ballast (standard wiring)
 EPSA HFB analogue dimmable 1–10 V
 EPSD HFB digital dimmable

Application:

Pendant or surface mounted light fittings for direct / indirect illumination.

Accessories:

Cord suspension 54103

Versions:

ERA pendant light fitting for direct / indirect illumination
 ERAD surface mounted or suspended light fitting for direct illumination only

Accessories:

Cord suspension 54101

Note:

Cord suspension set included in the fitting.



ERA 228 KO

	&	W	A	B	C	X	Y	R	kg
ERA128 (54)&	ALDP, KO	1x28 (54)	1305	182	75	1140	70	1200	3,5
ERA135 (49)&	ALDP, KO	1x35 (49)	1605	182	75	1440	200	1500	5,0
ERA228 (54)&	ALDPT5, KO	2x28 (54)	1305	290	95	1140	70	1200	5,0
ERA235 (49)&	ALDPT5, KO	2x35 (49)	1605	290	95	1440	200	1500	7,0

& – add to the basic code (optic type)

R, S – dimension for pendant mounting