



## ECOLUXX EXA ALDP

### Interior light fittings

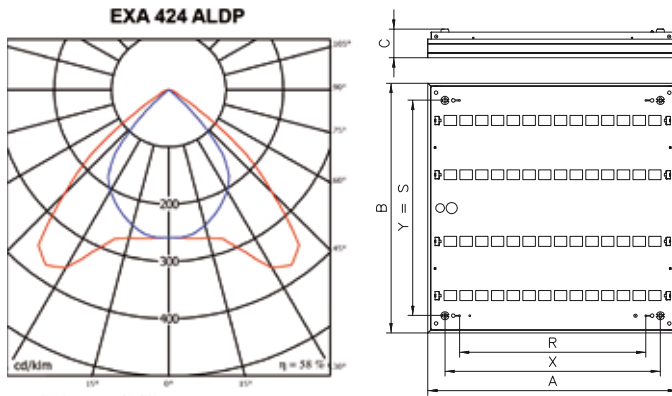

#### Optic:

ALDP double parabolic louvre of highly polished aluminium

#### Wiring:

EP high frequency ballast (standard wiring)  
 EPSA HFB analogue dimmable (1-10 V)  
 EPSD HFB digital dimmable

#### Versions:

EXA pendant light fitting for direct / indirect illumination  
 EXAD surface mounted or suspended light fitting for direct illumination only

#### Note:

Cord suspension set included in the fitting.



	W	A	B	C	X	Y	R	S	kg
EXA314-24ALDP	3x14/24	605	605	70	520	520	450	520	4,5
EXA414-24ALDP	4x14/24	605	605	70	520	520	450	520	4,5
EXA228-54ALDP	2x28/54	1205	300	70	1120	220	1050	220	3,0
EXA235-49ALDP	2x35/49	1505	300	70	1420	220	1350	220	7,0

R,S – dimension for pendant mounting

## ECOLUXX EXA WALL

### Interior light fittings

#### Optic:

KO opal cover ACRYL SATINE®

#### Wiring:

EP high frequency ballast (standard wiring)

#### Application:

Surface mounted on the wall or to the ceiling – double side fitting  
 Pendant light fitting

	W	A	B	C	X	Y	kg
EXAWALL214-24KO	2x14/24	605	185	45	520	0	3,0
EXAWALL228-54KO	2x28/54	1205	185	45	950	0	3,0