

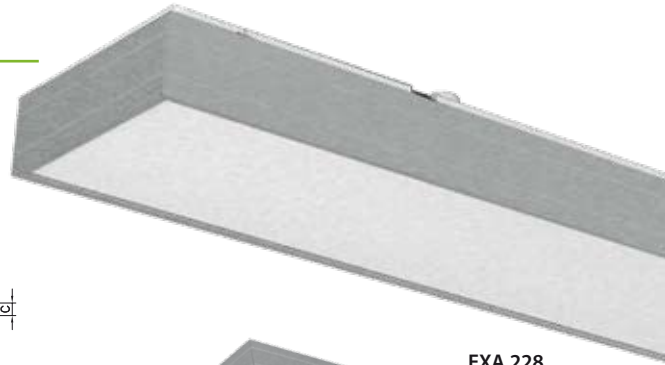


ECOLUXX EXA KO

Interior light fittings

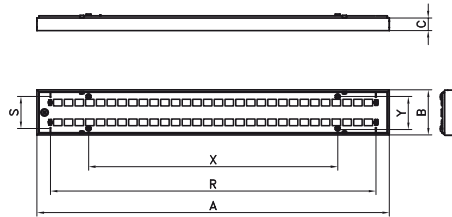

EXA 228

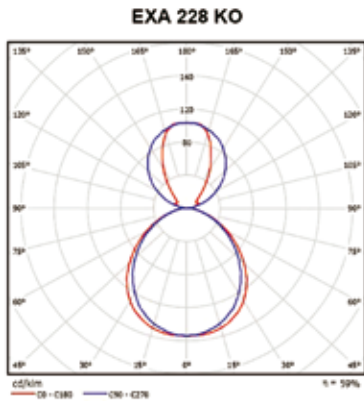

EXA 414



Body:

Aluminium profile

Optic:

KO – opal cover ACRYL SATINE®

Wiring:

- EP high frequency ballast (standard wiring)
- EPSA HFB analogue dimmable (1-10 V)
- EPSD HFB digital dimmable

Application:

Pendant or surface mounted light fittings for direct - indirect illumination.
Surface mounted on the wall – double side fitting

Accessories:

Cord suspension 54101 (only for 2 lams version), 54103

Versions:

- EXA pendant light fitting for direct / indirect illumination
- EXAD surface mounted or suspended light fitting for direct illumination only
- EXA WALL Surface mounted on the wall – double side fitting

Note:

Cord suspension set included in the fitting



EXA WALL 228

	W	A	B	C	X	Y	R	S	kg
EXA214 (24)KO	2x14 (24)	622	160	60	520	120	520	0	2,5
EXA414 (24)KO	4x14 (24)	622	622	60	520	520	520	520	4,5
EXA228 (54)KO	2x28 (54)	1250	160	60	1150	120	1150	0	3,0
EXA428 (54)KO	4x28 (54)	1250	622	60	1150	520	1150	520	5,5
EXA235 (49)KO	2x35 (49)	1550	160	60	1450	100	1450	0	7,0

R, S – dimension for pendant mounting