


ECOLUXX HELIOS DS, HELIOS P

Emergency light unit



HELIOS P

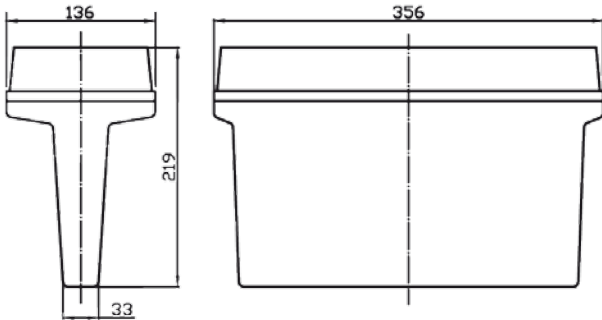

HELIOS DS



Body: White polycarbonate body

Optic: Polycarbonate opal cover

Application: Surface mounted luminaire for emergency lighting of escape ways.

Accessories: Pictograms PIK

Versions:

- SE non-maintained
- SA maintained
- AT autotest
- PT manual test button
- RS RUBIC monitoring system

Next information: The luminaire is delivered without pictogram, it must be ordered separately.

Type	IP	Order code	&	#	W	H	lm
HELIOS DS 8	IP42	OZAWHDE1&#	SE, SA	AT, PT, RS	1x8 T5	1	130
		OZAWHDE3&#	SE, SA	AT, PT, RS	1x8 T5	3	110
	IP65	OZAWHD1&#	SE, SA	AT, PT, RS	1x8 T5	1	130
		OZAWHD3&#	SE, SA	AT, PT, RS	1x8 T5	3	110
HELIOS DS11	IP42	OZAWHDE1&11#	SE, SA	AT, PT, RS	1x11 TC-S	1	200
		OZAWHDE3&11#	SE, SA	AT, PT, RS	1x11 TC-S	3	180
	IP65	OZAWHD1&11#	SE, SA	AT, PT, RS	1x11 TC-S	1	200
		OZAWHD3&11#	SE, SA	AT, PT, RS	1x11 TC-S	3	180
HELIOS DS18	IP42	OZAWHDE1&18#	SE, SA	AT, PT, RS	1x18 TC-L	1	250
		OZAWHDE3&18#	SE, SA	AT, PT, RS	1x18 TC-L	3	230
	IP65	OZAWHD1&18#	SE, SA	AT, PT, RS	1x18 TC-L	1	250
		OZAWHD3&18#	SE, SA	AT, PT, RS	1x18 TC-L	3	230
HELIOS DS LED	IP42	OZAWHDEL1&#	SE, SA	PT	LED 25cd	1	
		OZAWHDEL3&#	SE, SA	PT	LED 25cd	3	
	IP65	OZAWHDL1&#	SE, SA	PT	LED 25cd	1	
		OZAWHDL3&#	SE, SA	PT	LED 25cd	3	
HELIOS P	IP42	OZAWHP1&#	SE, SA	AT, PT, RS	1x8 T5	1	130
		OZAWHP3&#	SE, SA	AT, PT, RS	1x8 T5	3	110
HELIOS P LED	IP42	OZAWHPL1&#	SE, SA	PT	LED 25cd	1	
		OZAWHPL3&#	SE, SA	PT	LED 25cd	3	

& - operating mode specification

- next specification