


# ECOLUXX I ALDP, MATDP

## Recessed light fittings



I418ALDP

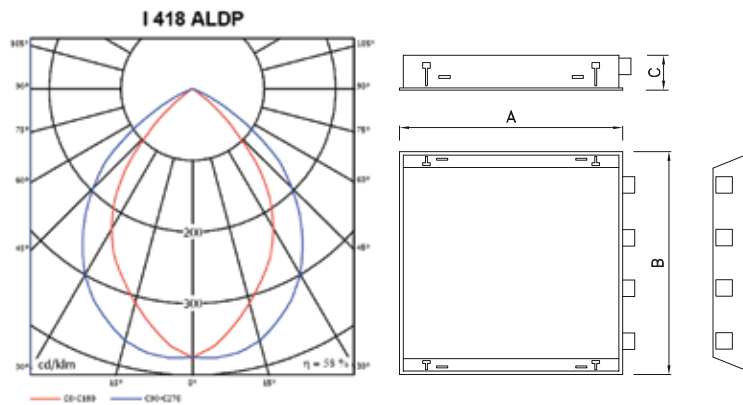

### Body:

White painted (RAL 9003) metal sheet

### Optic:

ALDP double parabolic louvre category 2 of highly polished aluminium  
 MATDP double parabolic louvre category 2 of mat aluminium

### Wiring:

compensated, ballast cat. B  
 EP high frequency ballast  
 EPSA HFB analogue dimmable 1–10 V  
 EPSD HFB digital dimmable

### Application:

Recessed light fitting for installation into false ceiling with visible supporting structure (600x600 / 625x625 modules) or gypsum plasterboard type ceiling.

### Accessories:

Fixing clips for installation into gypsum plasterboard – 54214  
 Reduction frame for installing the 600 module light fitting into the 625 module frame


### Versions:

600 for 600 module  
 625 for 625 module  
 K with WIELAND connector  
 F with flexible cord  
 NZ emergency pack  
 OK 2 circuit wiring

*	#	W	Modul 600			Modul 625			C	kg
			A	B		A	B			
I118ALDP#	600, 625, EP, K, F, NZ	1x18	596	184		622	184		94	2,1
I218ALDP#	600, 625, EP, K, F, NZ	2x18	596	296		622	310		94	2,5
I318ALDP#	600, 625, EP, K, F, NZ, OK	3x18	596	596		622	622		94	4,8
I418ALDP#	600, 625, EP, K, F, NZ, OK	4x18	596	596		622	622		94	4,9
I136ALDP#	600, 625, EP, K, F, NZ	1x36	1196	184		1246	184		94	2,9
I236ALDP#	600, 625, EP, K, F, NZ, OK	2x36	1196	296		1246	310		94	4,9
I336ALDP#	600, 625, EP, K, F, NZ, OK	3x36	1196	596		1246	622		94	9,1
I436ALDP#	600, 625, EP, K, F, NZ, OK	4x36	1196	596		1246	622		94	9,5
I158ALDP#	600, 625, EP, K, F, NZ	1x58	1496	184		1546	184		94	3,9
I258ALDP#	600, 625, EP, K, F, NZ, OK	2x58	1496	296		1546	310		94	6,1
I358ALDP#	600, 625, EP, K, F, NZ, OK	3x58	1496	596		1546	622		94	10,5
I458ALDP#	600, 625, EP, K, F, NZ, OK	4x58	1496	596		1546	622		94	12,0

\* – use code ALDP or MATDP to determine louvre type

# – add to the basic code

 – cut out