



ECOLUXX I ALMAT

Recessed light fittings

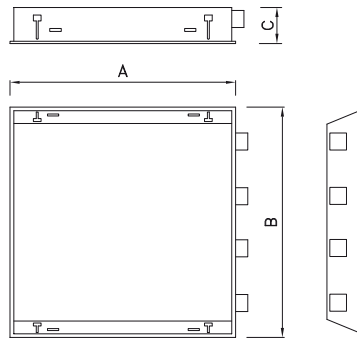

I418ALMAT

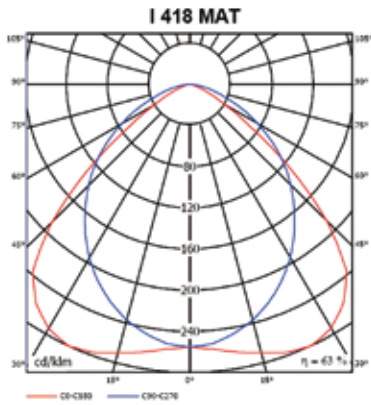

Body:

White painted (RAL 9003) metal sheet

Optic:

ALMAT parabolic louvre of mat aluminium

Wiring:

- compensated, ballast cat. B
- EP high frequency ballast
- EPSA HFB analogue dimmable 1–10 V
- EPSD HFB digital dimmable

Application:

Recessed light fitting for installation into false ceiling with visible supporting structure (600x600 / 625x625 modules) or gypsum plasterboard type ceiling.

Accessories:

Fixing clips for installation into gypsum plasterboard – 54214
Reduction frame for installing the 600 module light fitting into the 625 module frame

Versions:

- 600 for 600 module
- 625 for 625 module
- K with WIELAND connector
- F with flexible cord
- NZ emergency pack
- OK 2 circuit wiring

	#	W	Modul 600			Modul 625			C	kg
			A	B		A	B			
I118ALMAT#	600, 625, EP, K, F, NZ	1x18	596	184		622	184		94	2,1
I218ALMAT#	600, 625, EP, K, F, NZ	2x18	596	296		622	310		94	2,5
I318ALMAT#	600, 625, EP, K, F, NZ, OK	3x18	596	596		622	622		94	4,8
I418ALMAT#	600, 625, EP, K, F, NZ, OK	4x18	596	596		622	622		94	4,9
I136ALMAT#	600, 625, EP, K, F, NZ	1x36	1196	184		1246	184		94	2,9
I236ALMAT#	600, 625, EP, K, F, NZ, OK	2x36	1196	296		1246	310		94	4,9
I336ALMAT#	600, 625, EP, K, F, NZ, OK	3x36	1196	596		1246	622		94	9,1
I436ALMAT#	600, 625, EP, K, F, NZ, OK	4x36	1196	596		1246	622		94	9,5
I158ALMAT#	600, 625, EP, K, F, NZ	1x58	1496	184		1546	184		94	3,9
I258ALMAT#	600, 625, EP, K, F, NZ, OK	2x58	1496	296		1546	310		94	6,1
I358ALMAT#	600, 625, EP, K, F, NZ, OK	3x58	1496	596		1546	622		94	10,5
I458ALMAT#	600, 625, EP, K, F, NZ, OK	4x58	1496	596		1546	622		94	12,0

- add to the basic code

- cut out