


ECOLUXX I ALU

Recessed light fittings

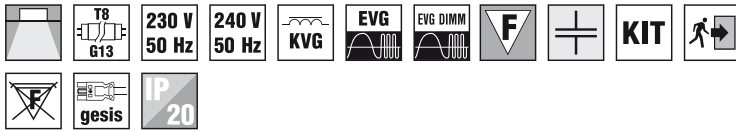

Optic:

ALU - parabolic louvre of highly polished aluminium with mat aluminium cross blades

Wiring:


compensated, ballast cat. B (standard)
 EP high frequency ballast
 EPSA HFB analogue dimmable (1-10 V)
 EPSD HFB digital dimmable

Versions:

600 for modul 600
 K with WIELAND connector
 F with flexible cord
 NZ emergency source
 OK 2 circuits wiring



I418ALU

	#	W	A	B	C		kg
I418ALU600#	EP, K, F, NZ, OK	4x18	596	596	94	576x576	4,9

ECOLUXX I ALDPV

Recessed light fittings



Optic:

ALDP double parabolic
 louvre category C2 of highly polished aluminium

Wiring:

EP high frequency ballast (standard)
 EPSA HFB analogue dimmable (1-10 V)
 EPSD HFB digital dimmable


Versions:

600 for modul 600
 625 for modul 625
 K with WIELAND connector
 F with flexible cord
 NZ emergency source
 OK 2 circuits wiring



*	#	W	Modul 600			Modul 625			C	kg
			A	B		A	B			
I414ALDPV#	600, 625, K, F, NZ, KIT	4x14	596	596	576x576	622	622	602x602	94	4,0
I424ALDPV#	600, 625, K, F, NZ, KIT	4x24	596	596	576x576	622	622	602x602	94	4,0

- add to the basic code

 - cut out