

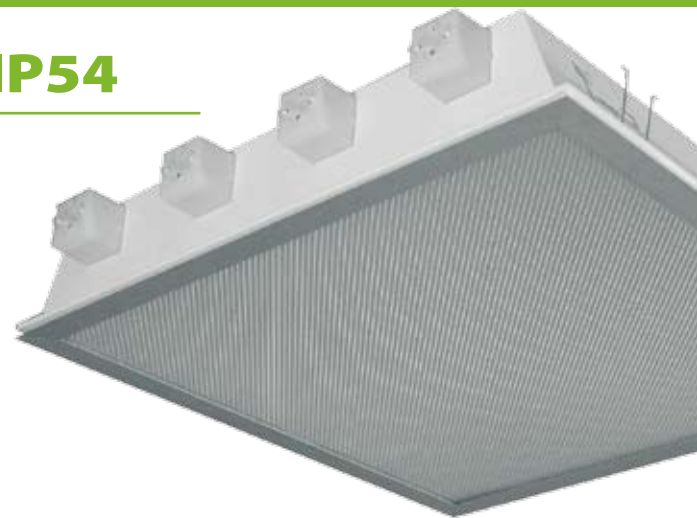


ECOLUXX I KP/IP54, I KO/IP54

Recessed light fittings IP54

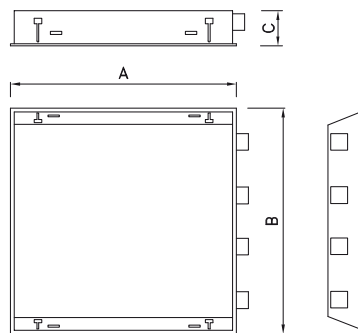

IKP418/IP54

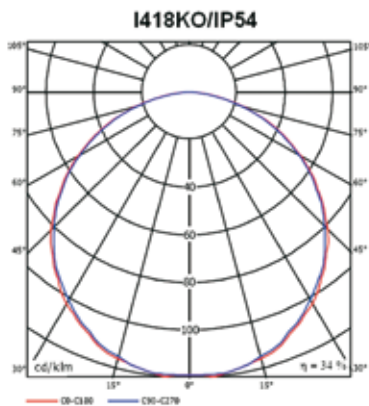

Body:

White painted (RAL 9003) metal sheet

Optic:

KO opal cover
KP prismatic cover

Wiring:

compensated, ballast cat. B (standard)
EP high frequency ballast
EPSA HFB analogue dimmable 1-10 V
EPSD HFB digital dimmable

Application:

Recessed fitting for installation into false ceiling with visible supporting structure (600x600 / 625x625 modules) or gypsum plasterboard type ceiling.

Accessories:

Fixing clips for installation into gypsum plasterboard – 54214

Versions:

600 for 600 module
625 for 625 module
K with WIELAND connector
F with flexible cord
NZ emergency source
OK 2 circuits wiring

Note:

Recessed fittings have IP54 protection only on bottom side of fittings.



	&	#	W	Modul 600			Modul 625			C	kg
				A	B		A	B			
I418&#/IP54	KO, KP	600, 625, EP, K, F, NZ, OK, ...	4x18	596	596	576x576	622	622	602x602	94	3,7
I236&#/IP54	KO, KP	600, 625, EP, K, F, NZ, OK, ...	2x36	1196	296	1176x276	1246	310	1226x290	94	6,5
I314 (24)&#/IP54	KO, KP	600, 625, K, F, NZ	3x14 (24)	596	596	576x576	622	622	602x602	60	4,5
I414 (24)&#/IP54	KO, KP	600, 625, K, F, NZ	4x14 (24)	596	596	576x576	622	622	602x602	60	4,5
I228 (54)&#/IP54	KO, KP	600, 625, K, F, NZ	2x28 (54)	1196	296	1176x276	1246	310	1226x29094	60	4,5

& – use cover type
– add to the basic code
 – cut out