



# ECOLUXX IKP, IKO

## Recessed light fittings

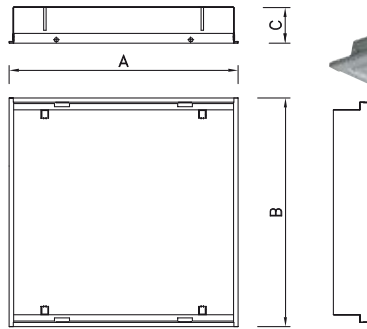

IKP418

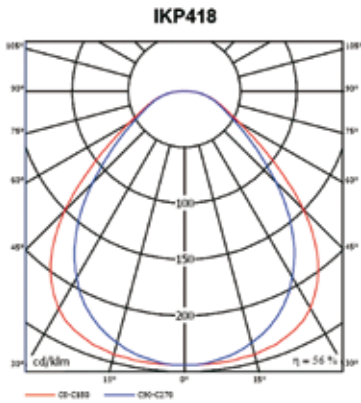

**Body:** White painted (RAL 9003) metal sheet

**Optic:**  
 KO opal cover  
 KP prismatic cover

**Wiring:**  
 compensated, ballast cat. B (standard)  
 EP high frequency ballast  
 EPSA HFB analogue dimmable 1–10 V  
 EPSD HFB digital dimmable

**Application:**  
 Recessed light fitting for installation into false ceiling with visible supporting structure (600x600 / 625x625 modules) or gypsum plasterboard type ceiling.

**Accessories:**  
 Fixing clips for installation into gypsum plasterboard – 542141  
 Reduction frame for installing the 600 module light fitting into the 625 module frame

**Versions:**  
 600 for 600 module  
 K with WIELAND connector  
 F with flexible cord  
 NZ emergency pack  
 OK 2 circuit wiring



	&	#	W	Modul 600			C	kg
				A	B			
I&118600 #	KO, KP	K, F, NZ	1x18	596	184	576x164	94	2,5
I&218600#	KO, KP	K, F, NZ	2x18	596	296	576x276	94	3,5
I&318600 #	KO, KP	K, F, NZ	3x18	596	596	576x576	94	5
I&418600 #	KO, KP	K, F, NZ, OK	4x18	596	596	576x576	94	5
I&136600 #	KO, KP	K, F, NZ	1x36	1196	184	1176x164	94	3,5
I&236600 #	KO, KP	K, F, NZ, OK	2x36	1196	296	1176x276	94	5,2
I&158600 #	KO, KP	K, F, NZ	1x58	1496	184	1476x164	94	4,5
I&258600 #	KO, KP	K, F, NZ, OK	2x58	1496	296	1476x249	94	7,5
I&314 (24)600 #	KO, KP	K, F, NZ	3x14 (24)	596	596	576x576	60	4
I&414 (24)600#	KO, KP	K, F, NZ, OK	4x14 (24)	596	596	576x576	60	4
I&228 (54)600 #	KO, KP	K, F, NZ	2x28 (54)	1196	296	1176x276	60	4

& – use cover type  
 # – add to the basic code  
 – cut out