


ECOLUXX IN2C

Recessed light fittings

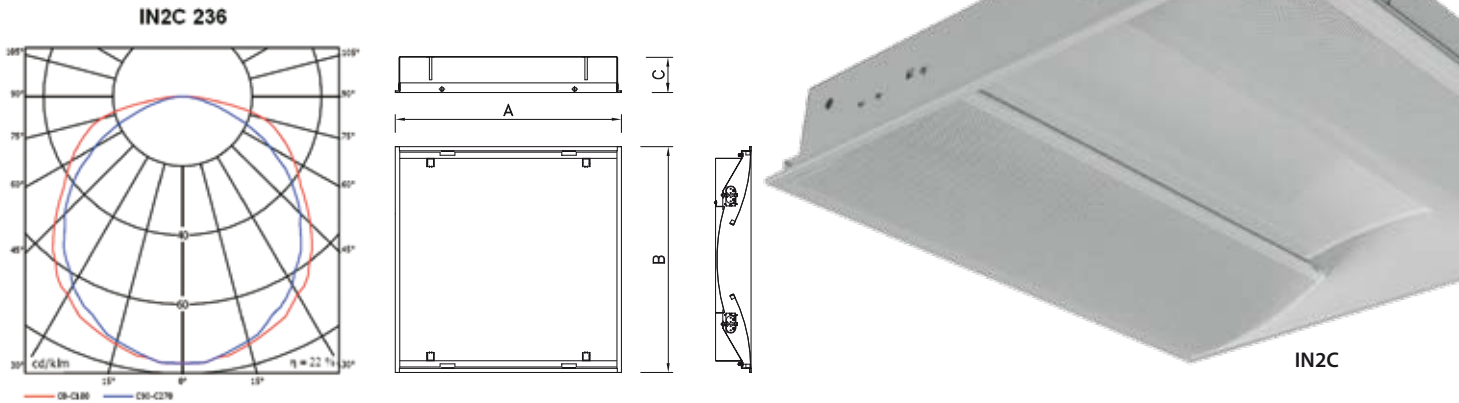

Body:

White painted (RAL 9003) metal sheet

Optic:

IN2C perforated lamps covers on the side of luminaire

Wiring:

compensated, ballast cat. B
 EP high frequency ballast
 EPSA HFB analogue dimmable 1–10 V
 EPSD HFB digital dimmable

Application:

Recessed light fitting for installation into false ceiling with visible supporting structure (module 600x600) or gypsum plasterboard.

Accessories:

- longer fixing clips for installing into gypsum plasterboard (542141)
- reduction frame (1064184000)

Versions:

K with WIELAND connector
 F with flexible cord
 NZ emergency pack

	#	W	lamp	A	B	C		kg
IN2C236#	EP, K, F, NZ	2x36	TC-L	596	596	94	576x576	5,5
IN2C255#	K, F, NZ	2x55	TC-L	596	596	94	576x576	5,3

– add to the basic code

– cut out