
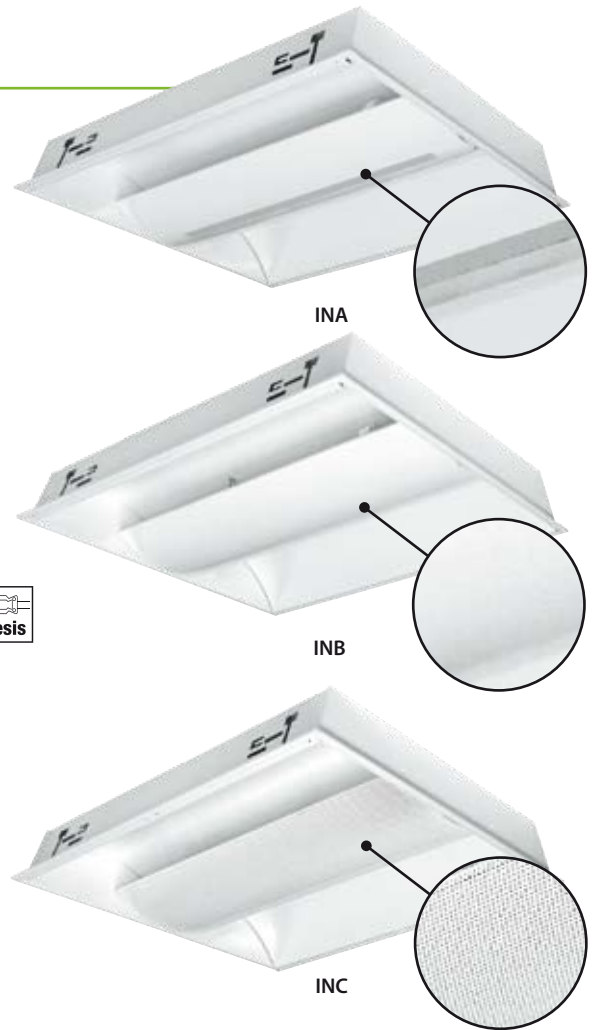



# ECOLUXX INA, B, C

## Recessed light fittings

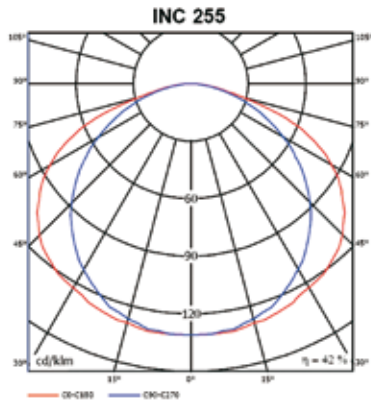

### Body:

White painted (RAL 9003) metal sheet

### Optic:

INA closed cover with stripe  
 INB closed cover  
 INC perforated lamp cover

### Wiring:

compensated, ballast cat. B  
 EP high frequency ballast  
 EPSA HFB analogue dimmable 1–10 V  
 EPSD HFB digital dimmable

### Application:

Recessed light fitting for installation into false ceiling with visible supporting structure (module 600x600) or gypsum plasterboard.

### Accessories:

- fixing clips for installing into gypsum plasterboard – 54214
- reduction frame (1064184000)

### Versions:

- K with WIELAND connector
- F with flexible cord
- NZ emergency pack

Typ *	#	W	lamp	A	B	C		kg
INA236#	EP, K, F, NZ	2x36	TC-L	596	596	94	576x576	5,5
INA155#	K, F, NZ	1x55	TC-L	596	596	94	576x576	5,0
INA255#	K, F, NZ	2x55	TC-L	596	596	94	576x576	5,3

\* – use code INA, INB or INC to determine cover type

# – add to the basic code

– cut out