



ECOLUXX KM

Surface mounted light fittings

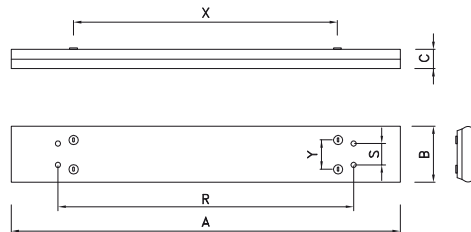

KMO 236

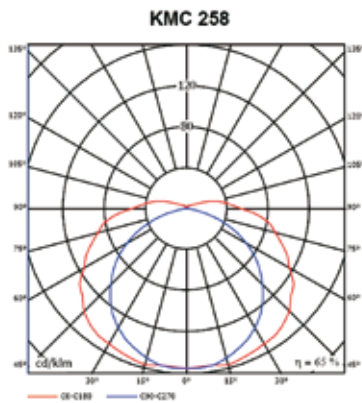

Body:

White painted (RAL 9003) metal sheet

Optic:

KMO opal acrylic cover
KMC prismatic acrylic cover

Wiring:

N uncompensated, ballast cat. B
K compensated, ballast cat. B
EP high frequency ballast
EPSA HFB analogue dimmable 1–10 V
EPSD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension.

Accessories:

Tube suspension 54107, 54108, 54109, 54110, 54111, 54112
Cord suspension 54103
Protection grid OM

Versions:

NZ emergency pack
P continuous assembly (through wiring)

Note:

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

Typ *	#	W	A	B	C	X	Y	R	S	kg
KMO118#	N, K, EP, NZ, P	1x18	625	110	75	500	0	550	0	1,6
KMO218#	N, K, EP, NZ, P	2x18	625	180	65	500	100	540	0	2,0
KMO136#	N, K, EP, NZ, P	1x36	1250	110	75	900	0	850	0	2,4
KMO236#	N, K, EP, NZ, P	2x36	1250	180	65	900	100	900	0	3,8
KMO336#	N, K, EP, NZ, P	3x36	1250	300	80	900	200	950	200	4,4
KMO258#	N, K, EP, NZ, P	2x58	1555	200	65	1200	100	1200	0	5,1

* – code with KMO or KMC by type of cover

– add to the basic code

R, S – dimension for pendant mounting