



## ECOLUXX KS

### Surface mounted light fittings

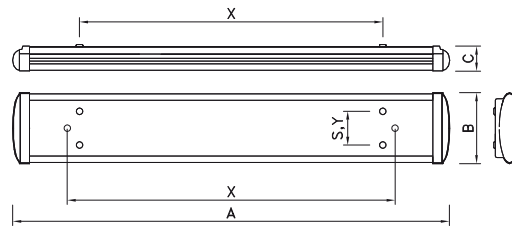

KS 236

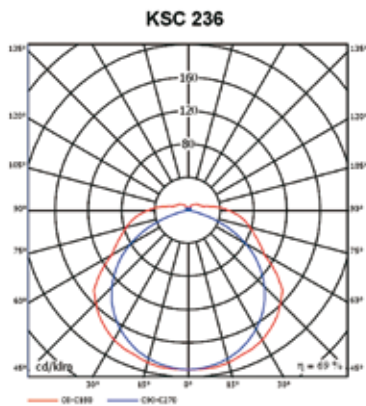

**Body:** White painted (RAL 9003) metal sheet

**Optic:**  
 KSO opal polystyrol cover  
 KSC prismatic polystyrol cover  
 KSSPMMA semiopal cover

**Wiring:**  
 N uncompensated, ballast cat. B  
 K compensated, ballast cat. B  
 EP high frequention ballast  
 EPSA HFB analogue dimmable 1–10 V  
 EPSD HFB digital dimmable

**Application:**  
 These light fittings can be used for surface mounting or suspension.

**Accessories:**  
 Tube suspension 54107, 54108, 54109, 54110, 54111, 54112  
 Cord suspension 54103  
 Protection grid OM  
 Standard endcap 4311011  
 Connecting endcap 4311012

**Versions:**  
 NZ emergency pack  
 P continuous assembly

**Note:** For end to end installation, continuous assembly fittings must be used (with through wiring 5x1,5 mm<sup>2</sup>), with connecting endcaps. They are labelled (P). Two standard endcaps are needed for either end of the continuous assembly and must be ordered separately.



Typ *	#	W	A	B	C	X	Y	R	S	kg
KSC118 #	N, K, EP, NZ, P	1x18	683	208	77	500	0	400	100	1,9
KSC218 #	N, K, EP, NZ, P	2x18	683	208	77	450	100	400	100	2,0
KSC136 #	N, K, EP, NZ, P	1x36	1293	208	77	800	0	900	100	3,2
KSC236 #	N, K, EP, NZ, P	2x36	1293	208	77	800	0	900	100	3,8
KSC158 #	N, K, EP, NZ, P	1x58	1593	208	77	1000	0	1100	100	4,8
KSC258 #	N, K, EP, NZ, P	2x58	1593	208	77	1000	0	1100	100	5,4
KSC114 (24) #	NZ, P	1x14 (24)	683	208	77	500	0	500	100	1,6
KSC214 (24) #	NZ, P	2x14 (24)	683	208	77	500	100	500	100	1,6
KSC128 (54) #	NZ, P	1x28 (54)	1293	208	77	1000	0	900	100	3,1
KSC228 (54) #	NZ, P	2x28 (54)	1293	208	77	1000	0	900	100	3,1
KSC135 (49) #	NZ, P	1x35 (49)	1593	208	77	1000	0	1100	100	4,4
KSC235 (49) #	NZ, P	2x35 (49)	1593	208	77	1000	0	1100	100	4,4

# – add to the basic code

\* – code with KSC, KSO or KSS by type of cover

R, S – dimension for pendant mounting