
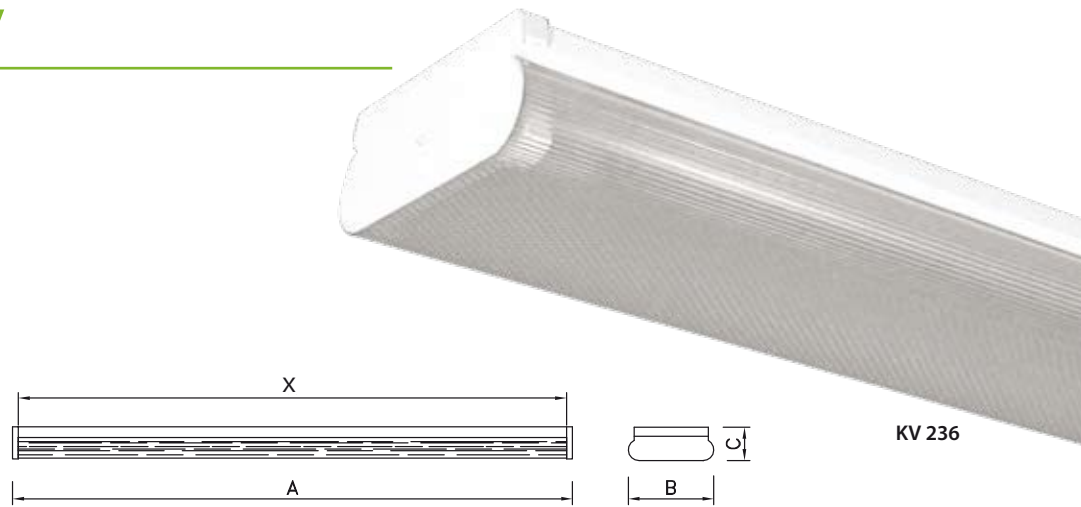


# ECOLUXX KV

## Interior light fittings IP44

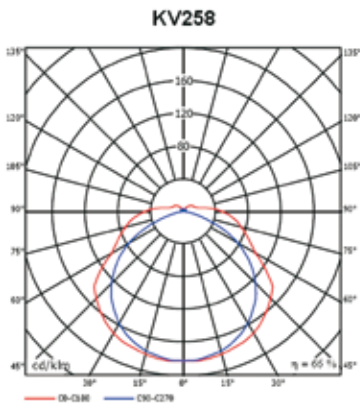

**Body:**

White painted (RAL 9003) metal sheet, plastic endcaps

**Optic:**

KVO opal acrylic cover  
KV prismatic acrylic cover

**Wiring:**

N uncompensated, ballast cat. B  
K compensated, ballast cat. B  
EP high frequency ballast  
EPSA HFB analogue dimmable 1–10 V  
EPSD HFB digital dimmable

**Application:**

These light fittings can be used for surface mounting or suspension.

**Accessories:**

Tube suspension 54107, 54108, 54109, 54110, 54111, 54112  
Cord suspension 54103  
Protection grid OM

**Versions:**

NZ emergency pack

**Note:**

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

	#	W	A	B	C	X
KV236#	N, K, EP, NZ	2x36	1230	170	70	1166
KV258#	N, K, EP, NZ	2x58	1530	170	70	1466
KVO236#	N, K, EP, NZ	2x36	1230	170	70	1166
KVO258#	N, K, EP, NZ	2x58	1530	170	70	1466

# – add to the basic code