



ECOLUXX LL AL, B, ALMAT

Louvres fittings

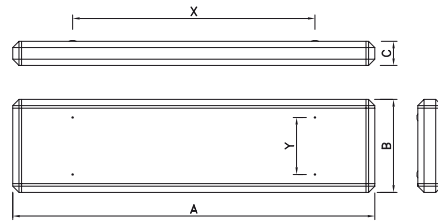

LL236AL

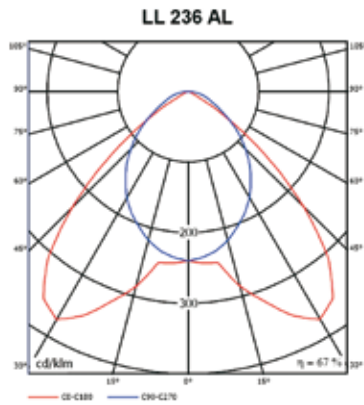

Body:

White painted (RAL 9003) metal sheet, plastic corners

Optic:

- AL parabolic louvre of highly polished aluminium with mat aluminium cross blades
- B white parabolic louvre
- ALMAT parabolic louvre of mat aluminium

Wiring:

- compensated, ballast cat. B (standard wiring)
- EP high frequency ballast
- EPSA HFB analogue dimmable 1-10 V
- EPSD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension.

Accessories:

- Tube suspension 54107, 54108, 54109, 54110, 54111, 54112
- Cord suspension 54103
- Protection grid OM

Versions:

- NZ emergency pack
- OK 2 circuit wiring

Note:

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

	&	#	W	A	B	C	X	Y	kg
LL118 &#	AL, B, ALMAT	EP, NZ	1x18	660	210	87	450	0	1,8
LL218 &#	AL, B, ALMAT	EP, NZ	2x18	660	330	87	465	215	2,5
LL318 &#	AL, B, ALMAT	EP, NZ, OK	3x18	660	660	87	450	250	4,7
LL418 &#	AL, B, ALMAT	EP, NZ, OK	4x18	660	660	87	450	300	4,9
LL136 &#	AL, B, ALMAT	EP, NZ	1x36	1278	210	87	850	0	2,9
LL236 &#	AL, B, ALMAT	EP, NZ, OK	2x36	1278	330	87	850	215	4,9
LL336 &#	AL, B, ALMAT	EP, NZ, OK	3x36	1278	660	87	850	250	8,8
LL436 &#	AL, B, ALMAT	EP, NZ, OK	4x36	1278	660	87	850	250	9,5
LL158 &#	AL, B, ALMAT	EP, NZ	1x58	1578	210	87	1250	0	3,9
LL258 &#	AL, B, ALMAT	EP, NZ, OK	2x58	1578	330	87	1250	215	6,1
LL358 &#	AL, B, ALMAT	EP, NZ, OK	3x58	1578	660	87	1250	250	12,5
LL458 &#	AL, B, ALMAT	EP, NZ, OK	4x58	1578	660	87	1250	300	14,1

& – add to the basic code (louvre type)

– add to the basic code