
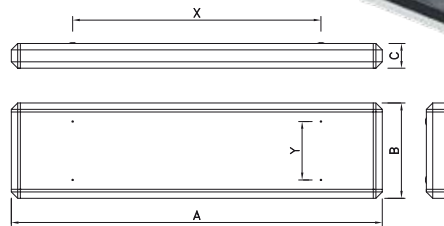


ECOLUXX LL ALDP

Louvres fittings

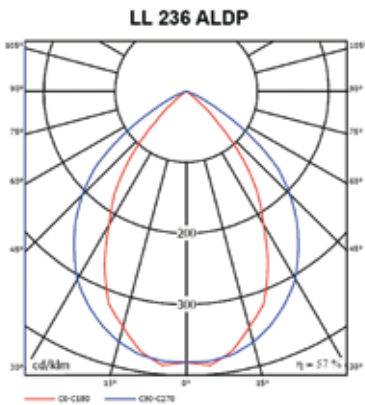

Body:

White painted (RAL 9003) metal sheet, plastic corners

Optic:

ALDP double parabolic louvre category 2 of highly polished aluminium

MATDP double parabolic louvre category 2 of mat aluminium

Wiring:

compensated, ballast cat. B (standard wiring)

EP high frequency ballast

EPSA HFB analogue dimmable 1–10 V

EPSD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension.

Accessories:

Tube suspension 54107, 54108, 54109, 54110, 54111, 54112

Cord suspension 54103

Protection grid OM

Versions:

NZ emergency pack

OK 2 circuit wiring

Note:

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

| | & | # | W | A | B | C | X | Y | kg |
|----------|-------------|------------|------|------|-----|----|------|-----|------|
| LL118 &# | ALDP, MATDP | EP, NZ | 1x18 | 660 | 210 | 87 | 450 | 0 | 1,8 |
| LL218 &# | ALDP, MATDP | EP, NZ | 2x18 | 660 | 330 | 87 | 465 | 215 | 2,5 |
| LL318 &# | ALDP, MATDP | EP, NZ, OK | 3x18 | 660 | 660 | 87 | 450 | 250 | 4,7 |
| LL418 &# | ALDP, MATDP | EP, NZ, OK | 4x18 | 660 | 660 | 87 | 450 | 300 | 4,9 |
| LL136 &# | ALDP, MATDP | EP, NZ | 1x36 | 1278 | 210 | 87 | 850 | 0 | 2,9 |
| LL236 &# | ALDP, MATDP | EP, NZ, OK | 2x36 | 1278 | 330 | 87 | 850 | 215 | 4,9 |
| LL336 &# | ALDP, MATDP | EP, NZ, OK | 3x36 | 1278 | 660 | 87 | 850 | 250 | 8,8 |
| LL436 &# | ALDP, MATDP | EP, NZ, OK | 4x36 | 1278 | 660 | 87 | 850 | 250 | 9,5 |
| LL158 &# | ALDP, MATDP | EP, NZ | 1x58 | 1578 | 210 | 87 | 1250 | 0 | 3,9 |
| LL258 &# | ALDP, MATDP | EP, NZ, OK | 2x58 | 1578 | 330 | 87 | 1250 | 215 | 6,1 |
| LL358 &# | ALDP, MATDP | EP, NZ, OK | 3x58 | 1578 | 660 | 87 | 1250 | 250 | 12,5 |
| LL458 &# | ALDP, MATDP | EP, NZ, OK | 4x58 | 1578 | 660 | 87 | 1250 | 300 | 14,1 |

& – add to the basic code (louvre type)

– add to the basic code