



ECOLUXX LLX AL, B

Louvres fittings

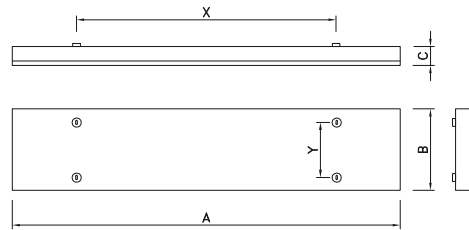

LLX236AL

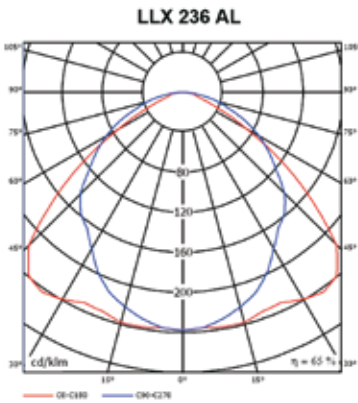

Body:

White painted (RAL 9003) metal sheet.

Optic:

- AL parabolic louvre of high polished aluminium with mat aluminium cross blades
- B white parabolic louvre

Wiring:

- compensated, ballast cat. B (standard)
- EP high frequency ballast
- EPSA HFB analogue dimmable 1-10 V
- EPSD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension.

Accessories:

- Tube suspension 54107, 54108, 54109, 54110, 54111, 54112
- Cord suspension 54103
- Protection grid OM

Versions:

- NZ emergency pack
- OK 2 circuit wiring
- RAL9006 finished in RAL 9006

Note:

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

	&	#	W	A	B	C	X	Y	kg
LLX118	AL, B	EP, NZ	1x18	650	170	65	340	0	2,3
LLX218	AL, B	EP, NZ	2x18	650	266	65	340	180	2,7
LLX318	AL, B	EP, NZ, OK	3x18	650	362	65	340	270	4,3
LLX418	AL, B	EP, NZ, OK	4x18	650	457	65	340	360	4,7
LLX136	AL, B	EP, NZ	1x36	1260	170	65	950	0	3,9
LLX236	AL, B	EP, NZ, OK	2x36	1260	266	65	950	180	4,8
LLX336	AL, B	EP, NZ, OK	3x36	1260	362	65	950	270	7,6
LLX436	AL, B	EP, NZ, OK	4x36	1260	457	65	950	360	8,6
LLX158	AL, B	EP, NZ	1x58	1560	170	65	1250	0	4,7
LLX258	AL, B	EP, NZ, OK	2x58	1560	266	65	1250	180	6,6
LLX458	AL, B	EP, NZ, OK	4x58	1560	457	65	1250	360	11,9

& - add to the basic code (louvre type)

- add to the basic code