



# ECOLUXX LLY ALDP T5

## Louvres fittings

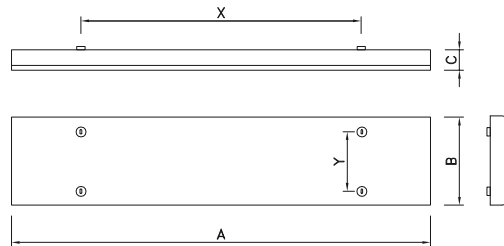

LLY 228 ALDP LED

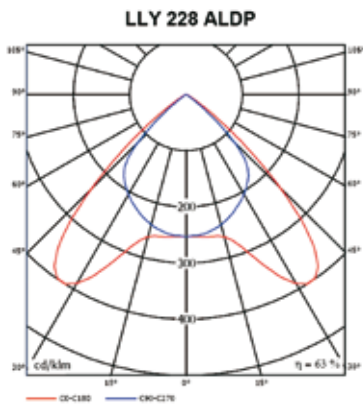

### Body:

White painted (RAL 9003) metal sheet

### Optic:

ALDP double parabolic louvre ALDP T5 category 2 of highly polished aluminium

### Wiring:

EP high frequency ballast  
 EPSA HFB analogue dimmable 1–10V  
 EPSD HFB digital dimmable

### Application:

These light fittings can be used for surface mounting or suspension.

### Accessories:

Tube suspension 54107, 54108, 54109, 54110, 54111, 54112  
 Cord suspension 54103  
 Protection grid OM

### Versions:

NZ emergency pack  
 OK 2 circuit wiring  
 RAL9006 finished in RAL 9006 (code LLYS...)  
 LED 3x1 W (150 lm, 25°), spot recessed into the movable frame

### Note:

Recommended as surface mounted. When the light fittings are suspended, they should be hung by 4 cords or tubes.



|                    | #  | W         | A    | B   | C  | X    | Y   | kg  |
|--------------------|----|-----------|------|-----|----|------|-----|-----|
| LLY114 (24) ALDP # | NZ | 1x14 (24) | 610  | 153 | 65 | 380  | 100 | 1,5 |
| LLY214 (24) ALDP # | NZ | 2x14 (24) | 610  | 238 | 65 | 380  | 150 | 1,8 |
| LLY214 (24) ALDP # | NZ | 2x14 (24) | 610  | 610 | 65 | 380  | 400 | 3,0 |
| LLY414 (24) ALDP # | NZ | 4x14 (24) | 610  | 610 | 65 | 380  | 400 | 3,0 |
| LLY128 (54) ALDP # | NZ | 1x28 (54) | 1213 | 153 | 65 | 900  | 100 | 3,0 |
| LLY228 (54) ALDP # | NZ | 2x28 (54) | 1213 | 238 | 65 | 900  | 150 | 4,0 |
| LLY135 (49) ALDP # | NZ | 1x35 (49) | 1513 | 153 | 65 | 1200 | 100 | 4,0 |
| LLY235 (49) ALDP # | NZ | 2x35 (49) | 1513 | 238 | 65 | 1200 | 150 | 5,5 |

|                       | #  | W         | A    | B   | C  | X    | Y   | kg  |
|-----------------------|----|-----------|------|-----|----|------|-----|-----|
| LLY228 (54) ALDPLED # | NZ | 2x28 (54) | 1580 | 238 | 65 | 980  | 150 | 4,0 |
| LLY235 (49) ALDPLED # | NZ | 2x35 (49) | 1780 | 238 | 65 | 1300 | 150 | 5,5 |

# – add to the basic code