
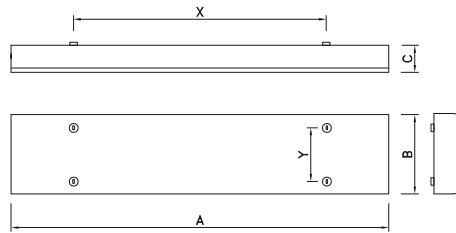


ECOLUXX LLY KO, KP

Surface mounted light fittings

MODUS LLY 236 KP

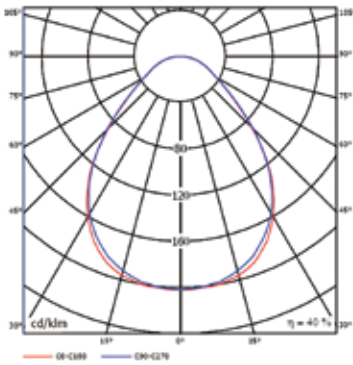

LLY 236 KP



Body:

White painted (RAL 9003) metal sheet

Optic:

- KO opal cover
- KP prismatic cover

Wiring:

- compensated, ballast cat. B (standard wiring)
- EP high frequency ballast
- EPSA HFB analogue dimmable 1–10 V
- EPSD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension.

Accessories:

- Tube suspension 54107, 54108, 54109, 54110, 54111, 54112
- Cord suspension 54103
- Protection grid OM

Versions:

- NZ emergency pack
- OK 2 circuit wiring
- RAL9006 finished in RAL 9006 (code LLYS...)

Note:

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

	&	#	W	A	B	C	X	Y	kg
LLY118 & #	KO, KP	EP, NZ	1x18	650	170	85	340	0	2,3
LLY218 & #	KO, KP	EP, NZ	2x18	650	266	85	340	180	2,7
LLY418 & #	KO, KP	EP, NZ, OK	4x18	650	650	85	400	400	4,7
LLY136 & #	KO, KP	EP, NZ	1x36	1260	170	85	950	0	3,9
LLY236 & #	KO, KP	EP, NZ, OK	2x36	1260	266	85	950	180	4,8
LLY158 & #	KO, KP	EP, NZ	1x58	1560	170	85	1250	0	4,7
LLY258 & #	KO, KP	EP, NZ, OK	2x58	1560	266	85	1250	180	6,6

& – add to the basic code (cover type)

– add to the basic code