
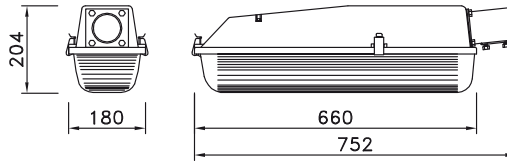


ECOLUXX LV

Public lighting

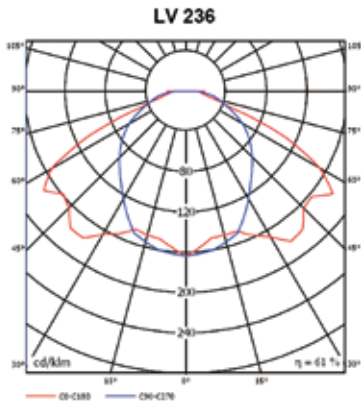

Body: High quality glass reinforced pressed polyester body, with polycarbonate cover

Optic: White painted steel sheet reflector inside, polycarbonate cover – Fresnel lens

Wiring: Compensated, ballast cat. B (standard wiring)
EP high frequency ballast

Lamp:
TC-L compact fluorescent lamp
S high pressure sodium lamp (HPS)
M high pressure mercury lamp (MBF)
SOX low pressure sodium lamp (SOX)

Application: Multi-purpose exterior fitting for roads, streets, parking lots, paths and others applications. Optimal for 5–8 m posts.

Versions:
POJ with fuse
OK 2 circuits wiring

Accessories:
V60flange for bracket diameter 60 – 1000004902
S60flange for post diameter 60 – 1000004904
V76flange for bracket diameter 76 – 1000004906
S76flange for post diameter 76 – 1000004908
V42flange for bracket diameter 42 – 1000004910
DVO wall holder 245039902

Next information: The fittings are delivered with flange as standard, but type of flange must be clearly specified when ordering.

	#	W	Lampholder	lamp	kg
LV118 #	EP	1x18	2G11	TC-L	3,9
LV218 #	EP,OK	2x18	2G11	TC-L	4,4
LV136 #	EP	1x36	2G11	TC-L	3,9
LV236 #	EP,OK	2x36	2G11	TC-L	4,4
LV336 #	EP,OK	3x36	2G11	TC-L	4,9
LV155	-	1x55	2G11	TC-L	3,7
LV255 #	OK	2x55	2G11	TC-L	3,7
LV70S	-	1x70	E27	HPS	5,2
LV80M	-	1x80	E27	MBF	4,9
LVSOX35 #	EP	1x35	B22d	SOX	5,5
LVSOX55 #	EP	1x55	B22d	SOX	5,7
LVE27	-	Max 1x100	E27	-	

- can be added to the basic code