



## ECOLUXX P

### Industrial light fittings with IP54

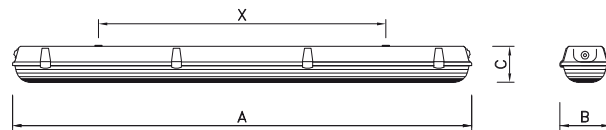

P236

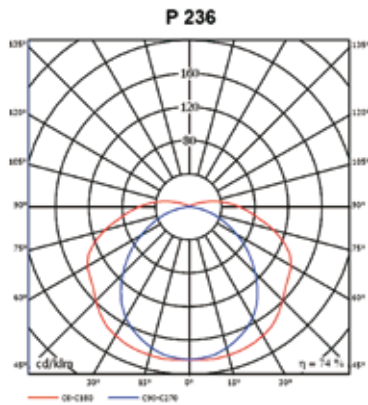

#### Body:

Polystyrol PS body + white painted (RAL 9003) metal sheet (standard version)

#### Optic:

PS polystyrol cover  
PC polycarbonate cover

#### Wiring:

N uncompensated, ballast cat. B  
K compensated, ballast cat. B  
EP high frequency ballast  
EPSA HFB analogue dimmable 1–10 V  
EPSD HFB digital dimmable

#### Application:

These light fittings can be used for surface mounting or suspension.

#### Accessories:

Suspension hook ZAHA 51009901  
Fixation clip ZAKO 54105  
Cord suspension 54102  
Protection grid OM

#### Versions:

NZ emergency pack (with HFB only)  
P continuous assembly (through wiring)  
AL highly polished aluminium reflector

#### Note:

These fittings are intended for use under normal environmental conditions,  $t_a = 25\text{ °C}$

	#	W	A	B	C	X	kg
P136#	N, K, EP, NZ, P, AL	1x36	1275	135	100	800	3,1
P236#	N, K, EP, NZ, P, AL	2x36	1275	135	100	800	3,6
P158#	N, K, EP, NZ, P, AL	1x58	1575	135	100	1100	4,8
P258#	N, K, EP, NZ, P, AL	2x58	1575	135	100	1100	5,3
P136PCS#	N, K, EP, NZ, P, AL	1x36	1275	135	100	800	3,1
P236PCS#	N, K, EP, NZ, P, AL	2x36	1275	135	100	800	3,6
P158PCS#	N, K, EP, NZ, P, AL	1x58	1575	135	100	1100	4,8
P258PCS#	N, K, EP, NZ, P, AL	2x58	1575	135	100	1100	5,3

# – add to the basic code