



# ECOLUXX P PCE, P PSE

## Industrial light fittings with IP65



P236 PCE

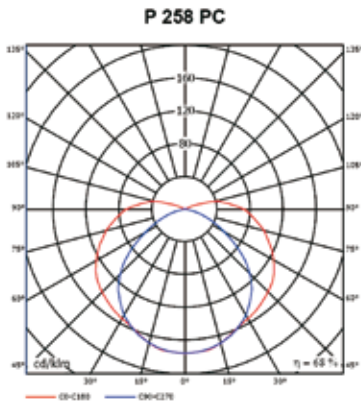

**Body:** PE - High quality glass reinforced pressed polyester body  
P polycarbonate body  
White painted (RAL 9003) metal sheet (standard version)

**Optic:** PS polystyrol cover  
PC polycarbonate cover  
PMMA polymethylacrylate cover

**Wiring:** N uncompensated, ballast cat. B  
K compensated, ballast cat. B  
EP high frequency ballast  
EPSA HFB analogue dimmable 1–10 V  
EPSD HFB digital dimmable

**Application:** These light fittings can be used for surface mounting or suspension.

**Accessories:** Suspension hook ZAHA 51009901  
Fixation clip ZAKO 54105  
Cord suspension 54102  
Protection grid OM

**Versions:** NZ emergency pack (for version with HFB only)  
P continuous assembly (through wiring)  
AL highly polished aluminium reflector

**Note:** These fittings are intended for use under normal environmental conditions,  $t_a = 25^\circ\text{C}$

	&	#	W	A	B	C	X	kg
P118 &E #	PC, PS	N, K, EP, NZ, P, AL	1x18	665	84	100	500	1,8
P136 &E #	PC, PS	N, K, EP, NZ, P, AL	1x36	1275	84	100	800	3,1
P158 &E #	PC, PS	N, K, EP, NZ, P, AL	1x58	1575	84	100	1100	4,1
P218 &E #	PC, PS	N, K, EP, NZ, P, AL	2x18	665	135	100	500	2,0
P236 &E #	PC, PS	N, K, EP, NZ, P, AL	2x36	1275	135	100	800	3,6
P258 &E #	PC, PS	N, K, EP, NZ, P, AL	2x58	1575	135	100	1100	5,3
P114 (24) &E #	PC, PS	N, K, EP, NZ, P, AL	1x14 (24)	665	84	100	500	1,6
P128 (54) &E #	PC, PS	N, K, EP, NZ, P, AL	1x28 (54)	1275	84	100	800	3,0
P135 (49, 80) &E #	PC, PS	N, K, EP, NZ, P, AL	1x35 (49, 80)	1575	84	100	1100	3,9
P214 (24) &E #	PC, PS	N, K, EP, NZ, P, AL	2x14 (24)	665	135	100	500	1,6
P228 (54) &E #	PC, PS	N, K, EP, NZ, P, AL	2x28 (54)	1275	135	100	800	3,0
P235 (49) &E #	PC, PS	N, K, EP, NZ, P, AL	2x35 (49, 80)	1575	135	100	1100	3,9

& - add to the basic code (cover type)  
- more on page 85  
# - add to the basic code