
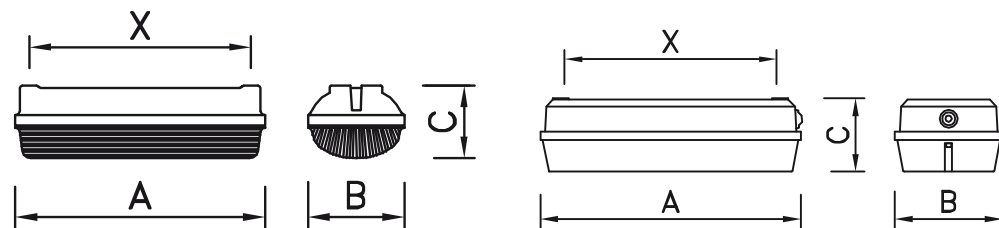


ECOLUXX PPX

Industrial light fittings with IP65

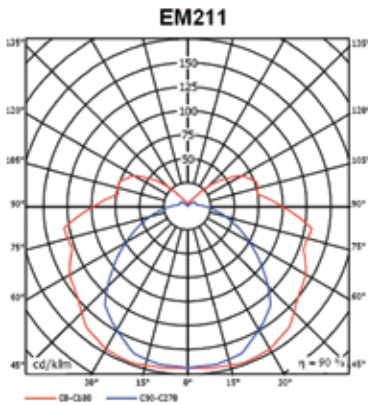

Body:

Injection moulded polycarbonate PC body

Optic:

PC polycarbonate cover

Wiring:

N uncompensated, ballast cat. B

Application:

These light fittings can be used for surface mounting.

Note:

These fittings are intended for use under normal environmental conditions, $t_3 = 25\text{ °C}$

Body:

Pressed polyester PE body

Optic:

PC polycarbonate cover

Wiring:

N uncompensated, ballast cat. B

Application:

These light fittings can be used for surface mounting.

Note:

These fittings are intended for use under normal environmental conditions, $t_3 = 25\text{ °C}$

	W	A	B	C	X	kg
EM111N	1x11	368	150	102	300	1,1
EM211N	2x11	368	150	102	300	1,5
PPX111N	1x11	285	110	85	245	1,1

- add to the basic code