



ECOLUXX SLIM ALDP

Surface mounted light fittings

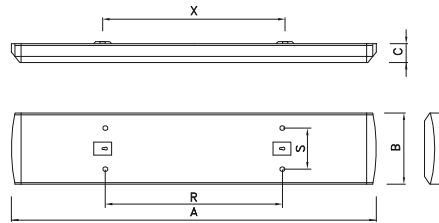

SLIM ALDP

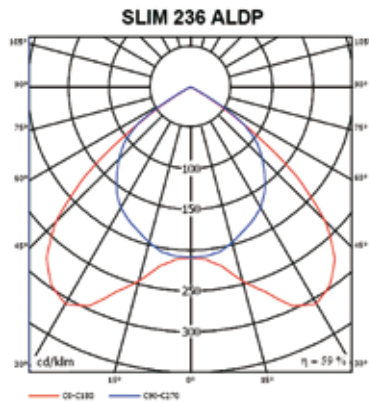

Body:

White painted (RAL 9003) metal sheet with plastic endcaps

Optic:

ALDP double parabolic louvre category 2 of highly polished aluminium
 MATDP double parabolic louvre category 2 of mat aluminium

Wiring:

compensated, ballast cat. B (standard wiring)
 EP high frequency ballast
 EPSA HFB analogue dimmable 1-10 V
 EPSD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension, they are recommended especially for offices with display screens.

Accessories:

Tube suspension 54107, 54108, 54109, 54110, 54111, 54112
 Cord suspension 54103

Versions:

NZ emergency pack
 P continuous assembly (through wiring) triple phase
 MIRO louvre made of MIRO aluminium

Note:

When the light fittings are suspended, they should be hung by 4 cords or tubes.



	&	#	W	A	B	C	X	Y	R	S	kg
SLIM136 & #	ALDP, MATDP	EP, NZ, P	1x36	1300	170	75	650	0	800	0	3,7
SLIM236 & #	ALDP, MATDP	EP, NZ, P	2x36	1300	255	75	650	0	650	156	5,6
SLIM158 & #	ALDP, MATDP	EP, NZ, P	1x58	1600	170	75	800	0	900	0	4,9
SLIM258 & #	ALDP, MATDP	EP, NZ, P	2x58	1600	255	75	800	0	800	156	7,3
SLIM128 (54) & #	ALDP, MATDP	EP, NZ, P	1x28 (54)	1255	170	75	650	0	750	0	3,3
SLIM228 (54) & #	ALDP, MATDP	EP, NZ, P	2x28 (54)	1255	255	75	650	0	650	156	4,5
SLIM135 (49) & #	ALDP, MATDP	EP, NZ, P	1x35 (49)	1555	170	75	800	0	900	0	4
SLIM235 (49) & #	ALDP, MATDP	EP, NZ, P	2x35 (49)	1555	255	75	800	0	800	156	5,5

& – add to the basic code (louvre type)

– add to the basic code

R, S – dimension for pendant mounting