
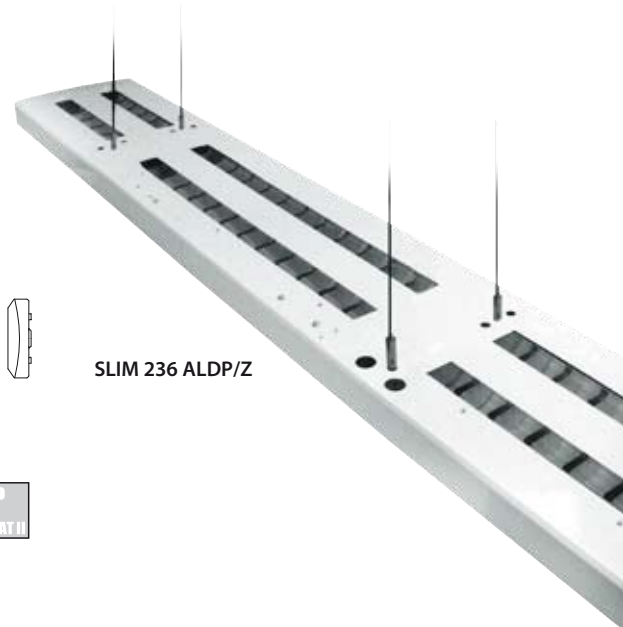
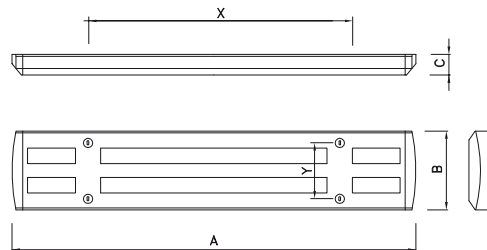


ECOLUXX SLIM ALDP/Z

Pendant direct-indirect light fittings

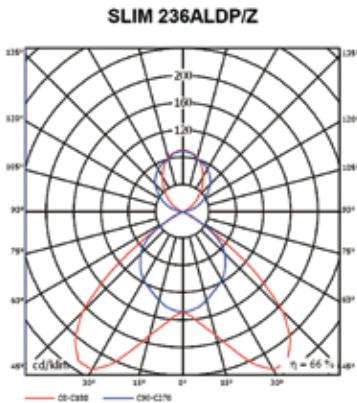

Body:

White painted (RAL 9003) metal sheet with plastic endcaps

Optic:

- ALDP double parabolic louvre category 2 of highly polished aluminium
- MATDP double parabolic louvre category 2 of mat aluminium

Wiring:

- compensated, ballast cat. B (standard wiring)
- EP high frequency ballast
- EPSA HFB analogue dimmable 1-10 V
- EPSD HFB digital dimmable

Application:

Pendant light fittings for direct / indirect illumination. These fittings can be connect to the straight rows. They are recommended especially for spaces with display screens.

Accessories:

- Tube suspension 54107, 54108, 54109, 54110, 54111, 54112
- Cord suspension 54103
- Endcap SLIM 1x 4333011
- Endcap SLIM 2x 4333012
- Connection part SLIM 1x 1331004007
- Connection part SLIM 2x 1332004007

Versions:

- NZ emergency pack
- MIRO louvre made of MIRO aluminium

Note:

When the light fittings are suspended, they should be hung by 4 cords or tubes. The light fittings for installation to the row (SLIM ALDP/ZR) are supplied without endcaps. For termination of each assembly, it is necessary to order 2 extra endcaps. The through wiring (continuous assembly) is triple phase (5x1,5 mm²).



*	&	W	A	B	C	X	Y	kg
SLIM136 & /Z	ALDP, MATDP	1x36	1300	170	75	650	90	3,7
SLIM236 & /Z	ALDP, MATDP	2x36	1300	255	75	650	180	5,6
SLIM158 & /Z	ALDP, MATDP	1x58	1600	170	75	800	90	4,9
SLIM258 & /Z	ALDP, MATDP	2x58	1600	255	75	800	180	7,3
SLIM128 (54) & /Z	ALDP, MATDP	1x28 (54)	1255	170	75	650	90	3,3
SLIM228 (54) & /Z	ALDP, MATDP	2x28 (54)	1255	255	75	650	180	4,5
SLIM135 (49) & /Z	ALDP, MATDP	1x35 (49)	1555	177	75	800	90	4,0
SLIM235 (49) & /Z	ALDP, MATDP	2x35 (49)	1555	255	75	800	180	5,5

* - use code /ZR by fittings for installation to the row
 & - add to the basic code (louvre type)