ECOLUXX SPMC

Recessed downlight

SPMC 218

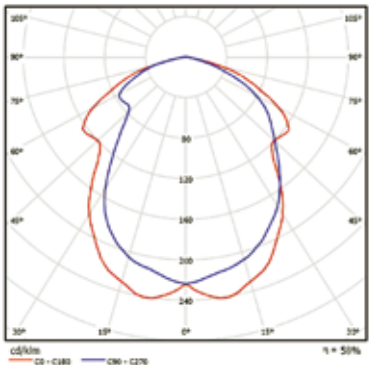

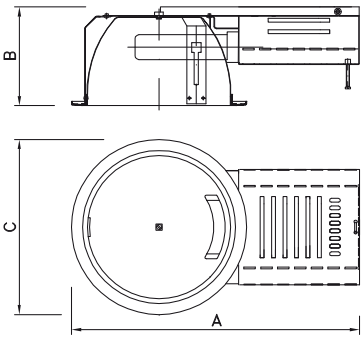

SPMC...170

Body:
Zinc-coated steel sheet, white paintened gear box, white aluminium ring.
Optic: REFAL embossed aluminium reflector
Wiring: N uncompensated, ballast cat. B
K compensated, ballast cat. B
EP high frequention ballast
EPSA HFB analogue dimmable 1–10 V
EPSD HFB digital dimmable
Application:
Recessed downlight for instalation into false ceiling.
Versions:
NZ (only for fittings with electronic ballast)
– embossed aluminium reflector Ø 145mm
– embossed aluminium reflector Ø 185mm
– embossed aluminium reflector Ø 215mm
Note:
These fittings can be equipped by clear or opal glass cover for IP43.

	#	W	A	B	C	□	kg
SPMC113#MB170	N, K, EP	1x13	360	120	190	170	1,1
SPMC118#MB170	N, K, EP	1x18	360	120	190	170	1,3
SPMC213#MB170	N, K, EP	2x13	360	120	190	170	1,5
SPMC218#MB170	N, K, EP	2x18	360	120	190	170	1,6
SPMC113#MB200	N, K, EP	1x13	370	140	225	210	1,2
SPMC118#MB200	N, K, EP	1x18	370	140	225	210	1,4
SPMC126#MB200	N, K, EP	1x26	370	140	225	210	1,5
SPMC132EPMB200		1x32	370	140	225	210	1,1
SPMC142EPMB200		1x42	370	140	225	210	1,1
SPMC213#MB200	N, K, EP	2x13	370	140	225	210	1,7
SPMC218#MB200	N, K, EP	2x18	370	140	225	210	1,8
SPMC226#MB200	N, K, EP	2x26	370	140	225	210	1,9
SPMC232EPMB200		2x32	370	140	225	210	1,2
SPMC242EPMB200		2x42	370	140	225	210	1,2
SPMC126#MB250	N, K, EP	1x26	400	180	260	245	1,5
SPMC132EPMB250		1x32	400	180	260	245	1,1
SPMC142EPMB250		1x42	400	180	260	245	1,1
SPMC226#MB250	N, K, EP	2x26	400	180	260	245	1,9
SPMC232EPMB250		2x32	400	180	260	245	1,2
SPMC242EPMB250		2x42	400	180	260	245	1,2