


ECOLUXX SPMD, SSC

Surface mounted downlight



SSC AL K1

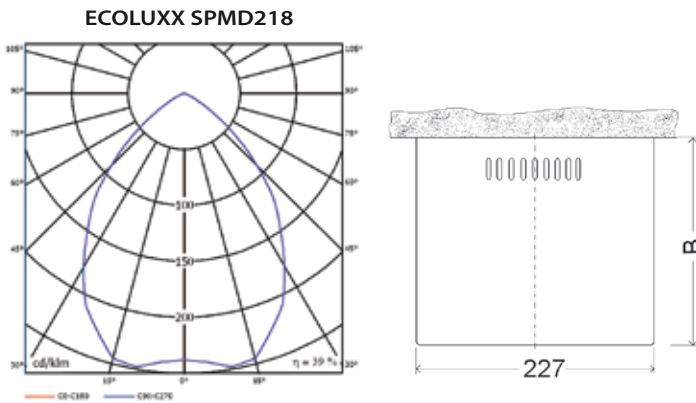

SPMD



Body:

Zinc-coated steel sheet, white painted metal ring.

Optic:

REFAL highly polished aluminium reflector

Wiring:

- N uncompensated, ballast cat. B
- EP high frequency ballast
- EPSA HFB analogue dimmable 1-10 V
- EPSD HFB digital dimmable

Application:

Surface mounted downlight.

Accessories:

- K1 opal glass into the reflector
- K2 opal glass cover outwards the reflector

Versions:

- NZ emergency pack (only for fittings with electronic ballast)

Note:

These fittings can be used as pendant by tube suspension.

	#	W	B	Ø	kg
SPMD113#	N, K, EP	1x13	200	227	1,4
SPMD118#	N, K, EP	1x18	200	227	1,4
SPMD126#	N, K, EP	1x26	200	227	1,6
SPMD213#	N, K, EP	2x13	200	227	1,7
SPMD218#	N, K, EP	2x18	200	227	1,7
SPMD226#	N, K, EP	2x26	200	227	2,2
	#	W	B	Ø	kg
SSC113AL#K1 (K2)	N, EP	1x13	146	227	1,5
SSC118AL#K1 (K2)	N, EP	1x18	146	227	1,5
SSC126AL#K1 (K2)	N, EP	1x26	146	227	1,7
SSC213AL#K1 (K2)	N, EP	2x13	146	227	1,8
SSC218AL#K1 (K2)	N, EP	2x18	146	227	1,8
SSC226AL#K1 (K2)	N, EP	2x26	146	227	2,3