

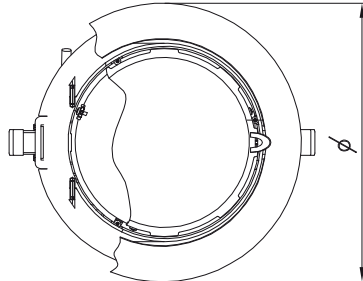
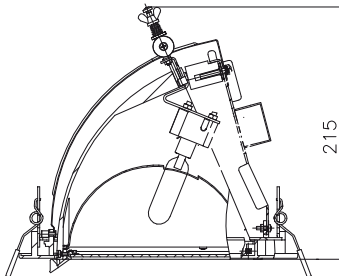


ECOLUXX SPME, SPMV

Recessed downlight

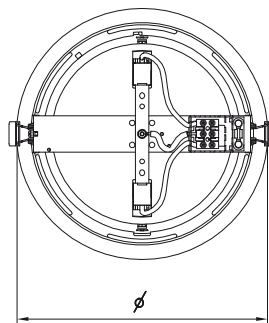

SPMV

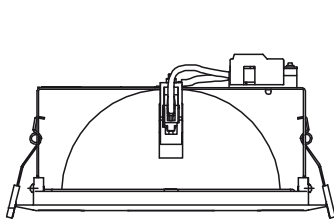

SPME



Body:

White painted aluminium body

Optic:

- matt aluminium reflector
- heat resistant front glass

Wiring:


- K compensated, ballast cat. B
- EP high frequency ballast

Application:

- Recessed downlight for installation into false ceiling
- SPME immovable luminaire
- SPMV movable luminaire

Note:

The gear box is located separately.

	#	W	Height	Ø		lamp	kg
SPME35#100/G12	K, EP	1x35	115	160	145	HIT	3,1
SPME50#100/G12	K, EP	1x50	115	160	145	HIT	3,3
SPME70#100/G12	K, EP	1x70	115	160	145	HIT	3,5
SPME70#200/RX7s	K, EP	1x70	115	230	215	HIT-DE	3,5
SPME150#200/RX7s	K, EP	1x150	115	230	215	HIT-DE	3,9

	#	W	Height	Ø		lamp	kg
SPMV70#100/G12	K, EP	1x70	215	160	145	HIT	3,1
SPMV100#200/G12	K, EP	1x150	215	235	215	HIT	3,3
SPMV150#200/G12	K, EP	1x150	215	235	215	HIT	3,5
SPMV70#200/RX7s	K, EP	1x70	215	235	215	HIT-DE	3,4
SPMV150#200/RX7s	K, EP	1x150	215	235	215	HIT-DE	3,9

- add to the basic code