



# ECOLUXX SPW

## Wall light fittings

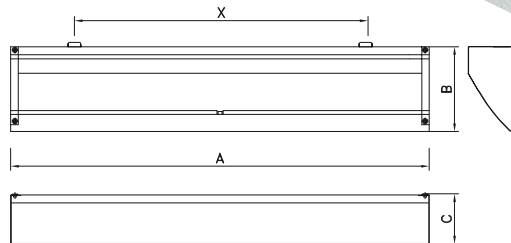

SPW 118

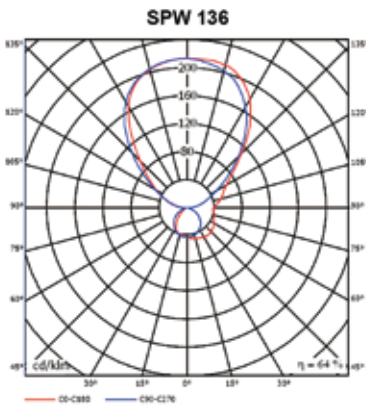

### Body:

White painted (RAL 9003) metal sheet, partial perforated

### Optic:

Prismatic cover (upper side of fitting)

### Wiring:

compensated, ballast cat. B (standard wiring – except TC-L 55 W)

EP high frequency ballast

EPSA HFB analogue dimmable 1–10 V

EPSD HFB digital dimmable

### Application:

Interior fittings for surface mounting on the wall.

	W	lamp	A	B	C	X	kg
SPW118	1x18	T8	645	140	80	450	2,0
SPW136TCL	1x36	TC-L	645	140	80	450	2,2
SPW136	1x36	T8	1255	140	80	1060	3,5
SPW236TCL	2x36	TC-L	1255	140	80	1060	4,0
SPW155	1x55	TC-L	645	140	80	450	1,8
SPW255	2x55	TC-L	1255	140	80	1060	3,0