



ECOLUXX V

Industrial light fittings with IP65

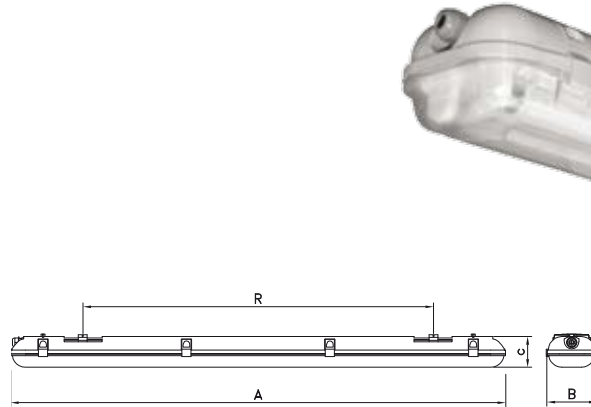

V3236

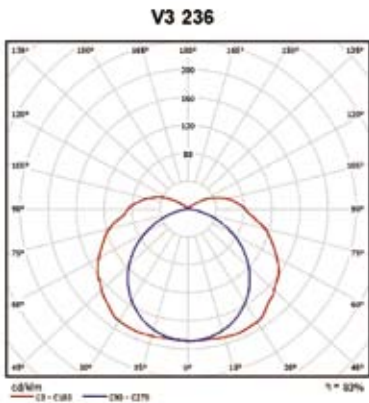

Body:

ABS or PC, white painted (RAL 9003) metal sheet, PC clips

Optic:

PC polycarbonate cover

Wiring:

- N uncompensated, ballast cat. B
- K compensated, ballast cat. B
- EP high frequency ballast
- EPSA HFB analogue dimmable (1-10 V)
- EPSD HFB digital dimmable

Versions:

- NZ emergency pack (for version with HFB only)
- P continuous assembly (through wiring)

Application:

These light fittings can be used as surface mounted or suspended.

Note:

The stainless holders for surface mounting or suspension are included in each packing of fitting.
These fittings are intended for use under ambient temperature max $t_a=40^{\circ}\text{C}$

Accessories V - included in each fitting



	#	Body	W	A	B	C	R	Kg
V3118#	N, K, EP, NZ, P	ABS	1x18W	660	86	90	350	1.40
V3118#PC	N, K, EP, NZ, P	PC	1x18W	660	86	90	350	1.40
V3218#	N, K, EP, NZ, P	ABS	2x18W	660	136	90	350	1.70
V3218#PC	N, K, EP, NZ, P	PC	2x18W	660	136	90	350	1.70
V3136#	N, K, EP, NZ, P	ABS	1x36W	1270	86	90	900	1.80
V3136#PC	N, K, EP, NZ, P	PC	1x36W	1270	86	90	900	1.80
V3236#	N, K, EP, NZ, P	ABS	2x36W	1270	136	90	900	2.10
V3236#PC	N, K, EP, NZ, P	PC	2x36W	1270	136	90	900	2.10
V3158#PC	N, K, EP, NZ, P	PC	1x58W	1570	86	90	1200	2.30
V3258#PC	N, K, EP, NZ, P	PC	2x58W	1570	136	90	1200	2.60

- add to the basic code