


ECOLUXX VV

Surface mounted low-bay

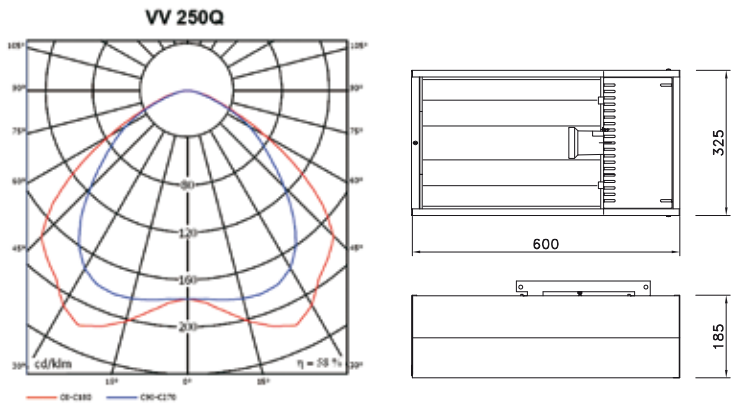

VV OM

Body:
White painted (RAL 9003) metal sheet with toughened front glass cover.
Movable light fitting holder for easy installation.

Optic:
– symmetric embossed aluminium reflector

Wiring:
K compensated, ballast cat. B
QS high pressure sodium or metal halide lamp (HPS, HQI)
M mercury lamp (MBF)
E40wiring with E40 lampholder only

Application:
High quality low bay for internal use.

Accessories:
Protection grid OM500

Next information:
VV low-bays are delivered without lamp. The right type of the lamp depends on components inside fitting – for info about recommended lamps visit our web sites www.ecoluxx.eu

	W	Ballast *	Ignitor	Lamp	Lampholder	CurrentA	kg
VV150Q	1x150	NAHJ	Serial 3,5-4,5kV	HQI	E27	1,8	8,5
VV150S	1x150	NAHJ	Serial 3,5-4,5kV	HPS	E40	1,8	8,5
VV250QS	1x250	NAHJ	Serial 3,5-4,5kV	HPS, HQI	E40	3	9,6
VV400QS	1x400	NAHJ	Serial 3,5-4,5kV	HPS, HQI	E40	4,6	10,5
VV250Q/2,15A	1x250	M	Paralel 0,6-1kV	HQI	E40	2,15	9,3
VV400Q/3,5A	1x400	M	Paralel 0,6-1kV	HQI	E40	3,5	10,2
VV80M	1x80	M	-	MBF	E27		7,0
VV125M	1x125	M	-	MBF	E27		7,5
VV250M	1x250	M	-	MBF	E40		9,5
VV400M	1x400	M	-	MBF	E40		10,2
VV E40	1x500	-	-	-	E40		6,5

* - NAHJ – ballast for high pressure sodium or metal halide lamps
- M ballast for mercury vapour lamp